

# Rectifier Diode

## W0797WC040 to W0797WC150

The data sheet on the subsequent pages of this document is a scanned copy of existing data for this product.

(Rating Report 87NR3 Issue 1)

This data reflects the old part number for this product which is: SW02-15CXC400. This part number must **NOT** be used for ordering purposes – please use the ordering particulars detailed below.

The limitations of this data are as follows:  
 Device no longer available for grade 02 (200V  $V_{RRM}/V_{DRM}$ )  
 No reverse recovery information available

Please use the following link to view an up to date outline drawing for this device  
[Outline W1](#)

Where any information on the product matrix page differs from that in the following data, the product matrix must be considered correct

An electronic data sheet for this product is presently in preparation.

For further information on this product, please contact your local ASM or distributor.

<b>Ordering Particulars</b>			
W0797	WC	◆◆	0
Fixed Type Code	Fixed Outline Code	Voltage code $V_{DRM}/100$ 04-15	Fixed Code
Typical Order Code: W0797WC060, 14mm clamp height, 600V $V_{RRM}$			

<p><b>IXYS Semiconductor GmbH</b>          Edisonstraße 15          D-68623 Lampertheim          Tel: +49 6206 503-0          Fax: +49 6206 503-627          E-mail: <a href="mailto:marcom@ixys.de">marcom@ixys.de</a></p>	<h1 style="color: red; margin: 0;">WESTCODE</h1> <p>An  IXYS Company</p> <p style="margin-top: 20px;"><a href="http://www.westcode.com">www.westcode.com</a></p> <p style="margin-top: 10px;"><a href="http://www.ixys.com">www.ixys.com</a></p>	<p><b>Westcode Semiconductors Ltd</b>          Langley Park Way, Langley Park,          Chippenham, Wiltshire, SN15 1GE.          Tel: +44 (0)1249 444524          Fax: +44 (0)1249 659448          E-mail: <a href="mailto:WSL.sales@westcode.com">WSL.sales@westcode.com</a></p> <p><b>Westcode Semiconductors Inc</b>          3270 Cherry Avenue          Long Beach CA 90807 USA          Tel: +1 (562) 595 6971          Fax: +1 (562) 595 8182          E-mail: <a href="mailto:WSI.sales@westcode.com">WSI.sales@westcode.com</a></p>
<p>The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd. <span style="float: right;">© Westcode Semiconductors Ltd.</span></p> <p>In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.</p> <p>Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.</p>		

QUALITY EVALUATION LABORATORY

Rating Report: 87NR3

Date: 25th March, 1987

Pages: 10

Diode Type SW02-15CXC400

Written by: *M.W. Junlop*

Checked: *M.W.*

Approved: *[Signature]*

This diode consists of a diffused 24mm diameter silicon slice mounted in a cold weld capsule housing.

This report supersedes Rating Report No. 79NR11.

Ratings

Voltage Grades	:	02-15
$V_{RSM}$	:	300-1600V
$V_{RRM}$	:	200-1500V
$I_{F(AV)}$ : Single Phase; 50 Hz, 180° half sinewave;		
Double side cooled $T_{HS} = 55^{\circ}C, 100^{\circ}C$	:	800A, 614A
Single side cooled $T_{HS} = 100^{\circ}C$	:	380A
$I_F$ (rms) max. )	:	1420A
) Double side cooled $T_{HS} = 25^{\circ}C$		
$I_F$ max. )	:	1240A
$I_{FSM}$ : t = 10ms half sinewave; $T_J$ (initial) = 190°C;		
$V_{RM} = 0.6 V_{RRM}(\text{Max})$	:	7500A
$I_{FSM}$ ; t = 10ms half sinewave; $T_J$ (initial) = 190°C; $V_{RM} \leq 10V$	:	8250A
$I^2t$ : t = 10ms; $T_J$ (initial) = 190°C; $V_{RM} = 0.6 V_{RRM}(\text{Max})$	:	$0.281 \times 10^6 A^2 \text{SECS}$
$I^2t$ : t = 10ms; $T_J$ (initial) = 190°C; $V_{RM} \leq 10V$	:	$0.34 \times 10^6 A^2 \text{SECS}$
$I^2t$ : t = 3ms; $T_J$ (initial) = 190°C; $V_{RM} \leq 10V$	:	$0.245 \times 10^6 A^2 \text{SECS}$
$T_{HS}$ Operating range	:	-40 to +190°C
$T_{stg}$ ; Non-operating	:	-40 to +200°C



CONTENTS

	<u>Page</u>
Ratings	1
Characteristics	2
Contents	3
Voltage Ratings	4
Dissipation and Heatsink Temperature vs Mean Current	5 & 6
Limit Forward Voltage Characteristic	7
Transient Thermal Impedance Characteristic	8
Surge Current and $I^2t$ vs Duration of Surge	9
Outline Drawing	10

Changes to Rating Report No. 79NR11



- P1 :  $V_{RWM}$  omitted
- $T_{HS}$  (MIN) reduced to  $-40^{\circ}C$
- P2 : JEDEC outline No. added
- P4 :  $V_{RWM}$  omitted
- P5-8 : Redrawn

Voltage Ratings



Voltage Class SW	V <sub>RRM</sub>	V <sub>RSM</sub> V
02	200	300
04	400	500
06	600	700
08	800	900
10	1000	1100
12	1200	1300
14	1400	1500
15	1500	1600


This report is applicable to higher or lower voltage grades when supply has been agreed by Sales/Production.

DOUBLE SIDE COOLED

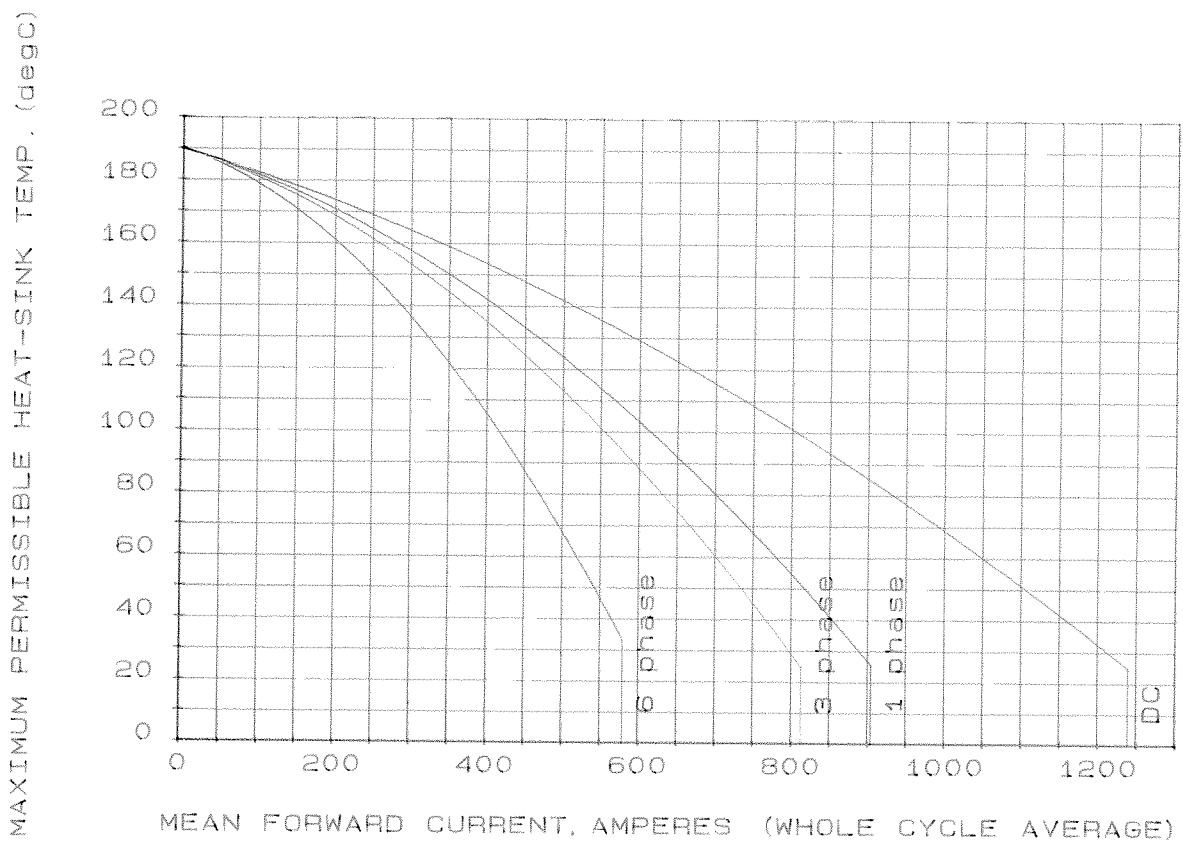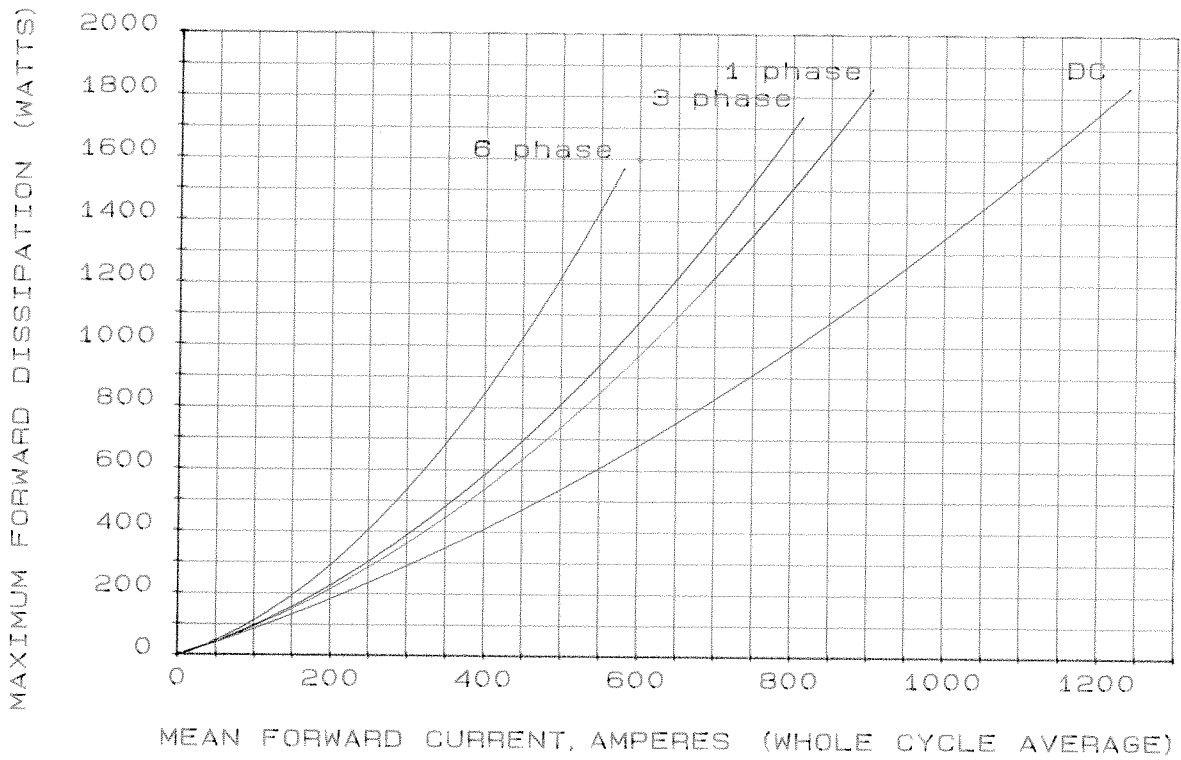


SINGLE SIDE COOLED

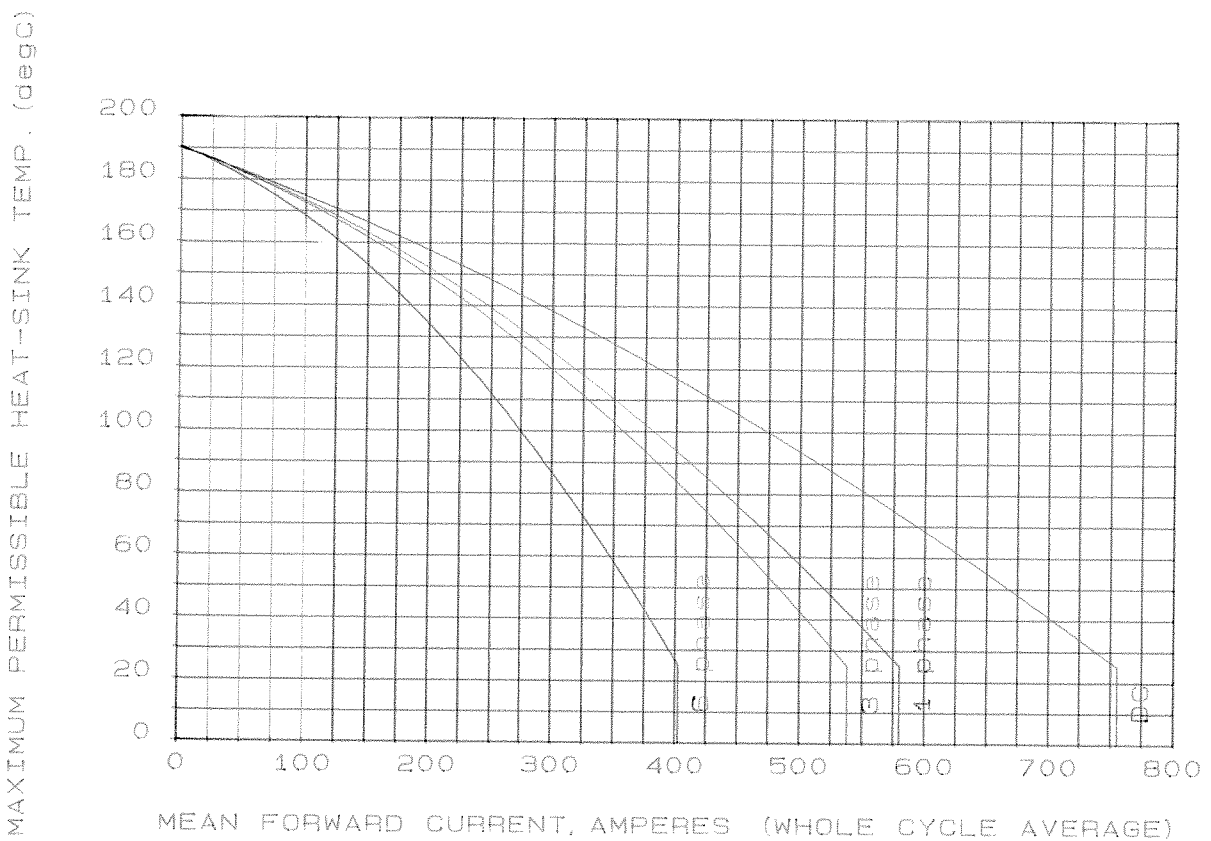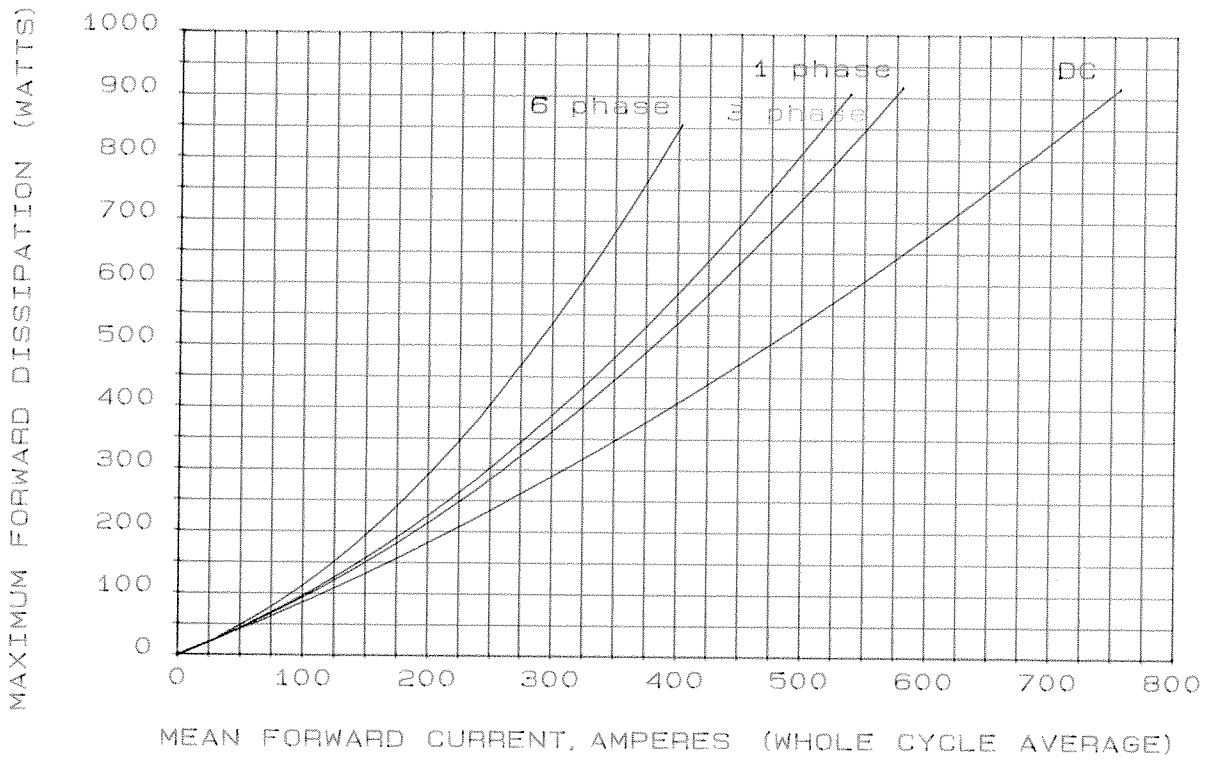

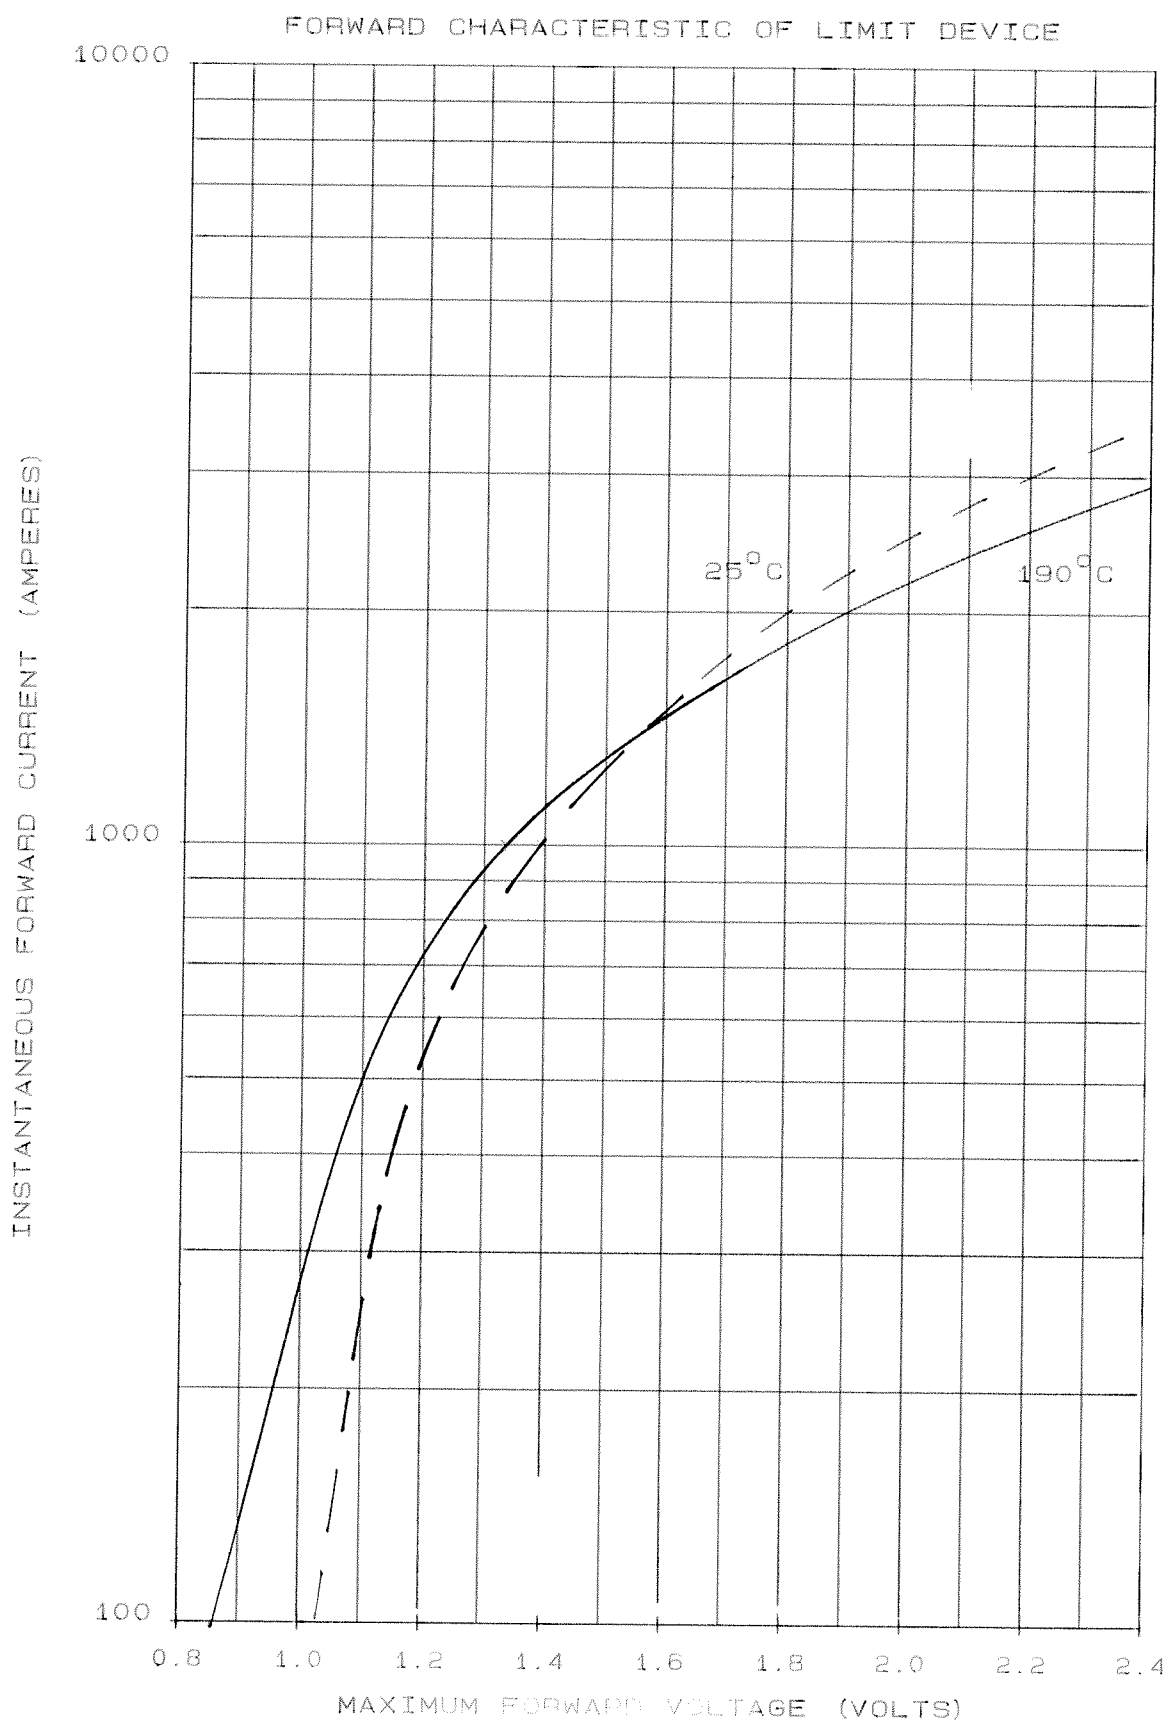




JUNCTION TO HEAT SINK TRANSIENT THERMAL IMPEDANCE

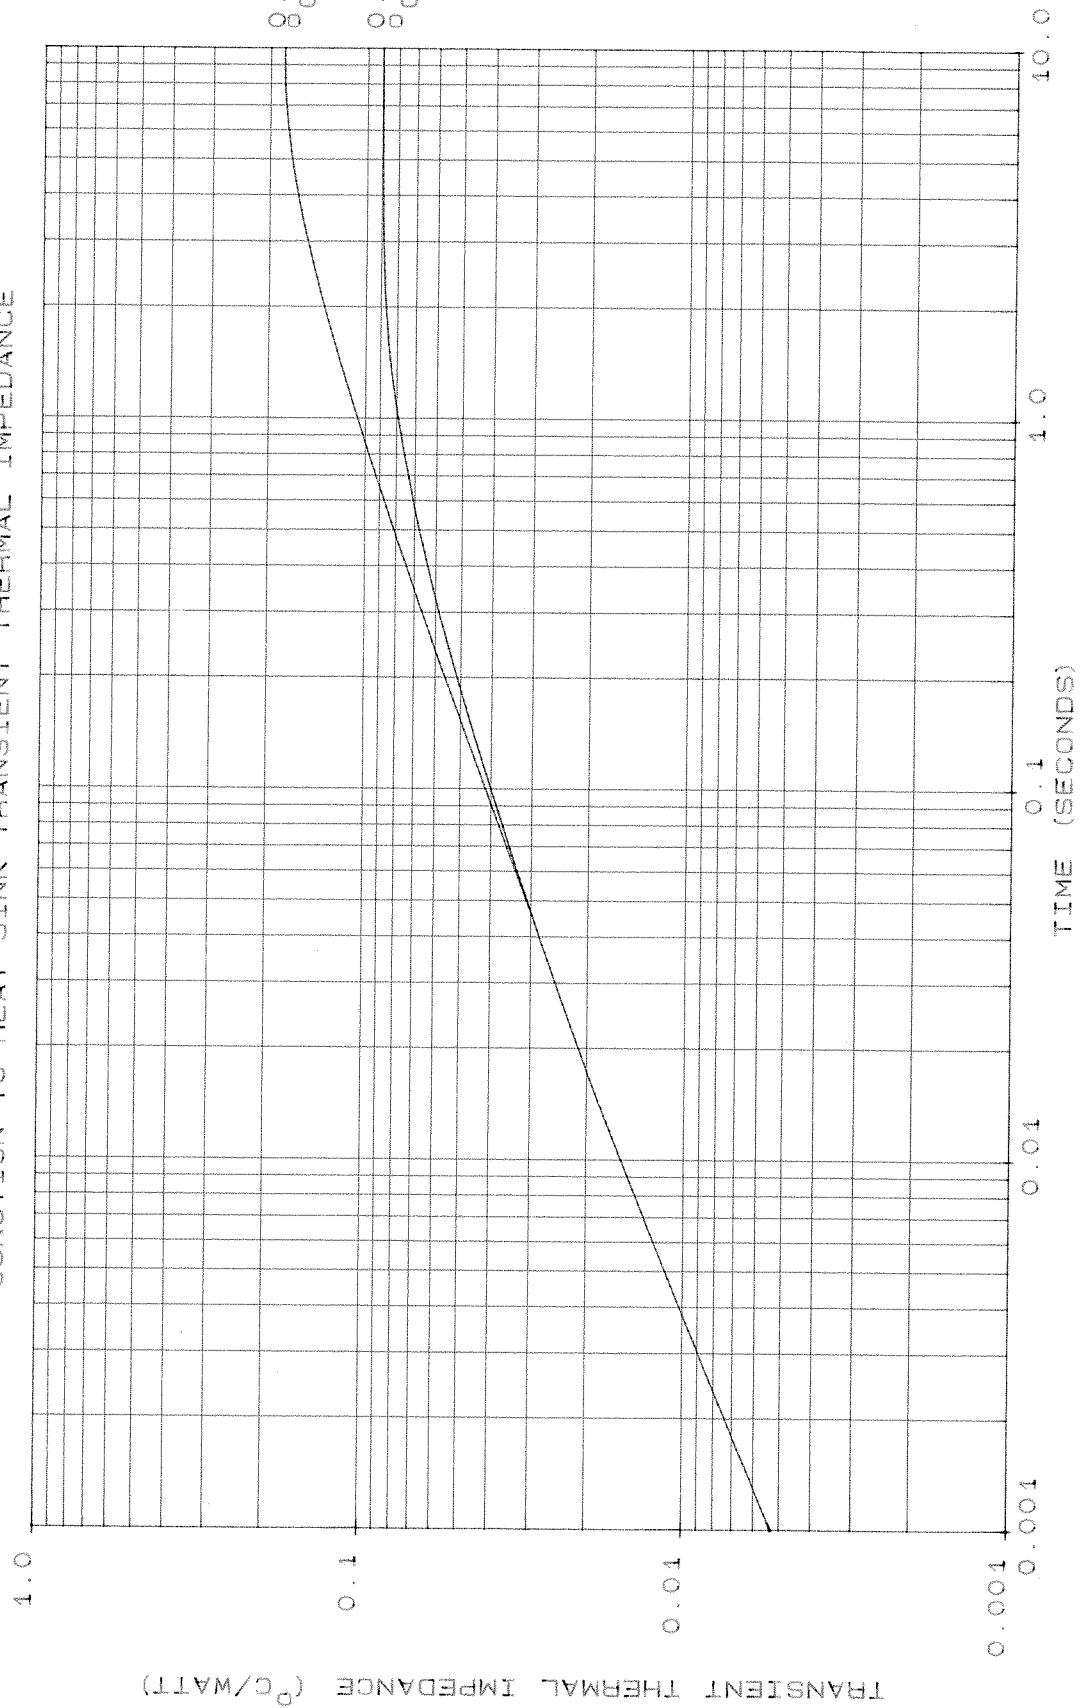

MAXIMUM NON REPETITIVE SURGE CURRENT AT INITIAL JUNCTION TEMPERATURE 190°C

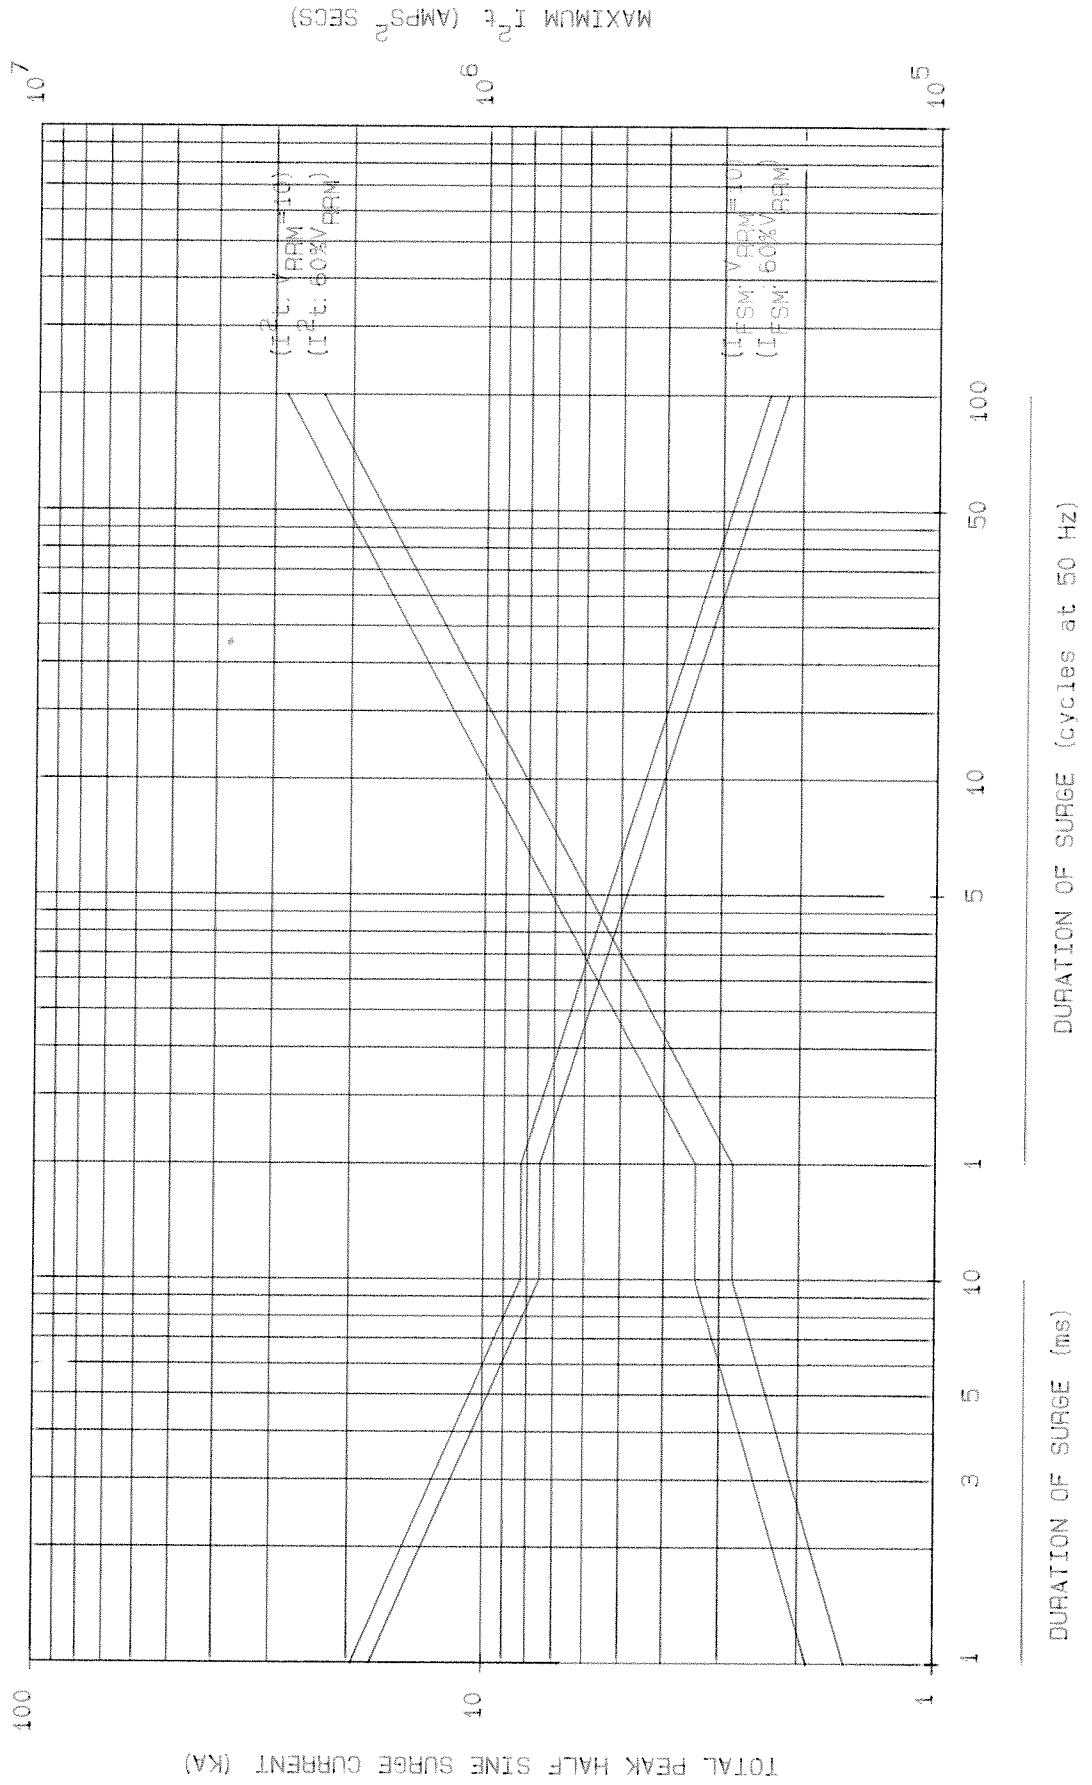



SCALE	1/1
DRN	<i>[Signature]</i>
CHKD	<i>[Signature]</i>
APPD	
A	
S	NI

INTERNATIONAL OUTLINE No. **DO-200AA**,  
 WEIGHT. **70 GRAMS**,  
 FINISH. **NICKEL PLATE**. - 10 -  
 DEVICE MARKING INCLUDES MONOGRAM, TYPE No., SPEC. No. AND POLARITY SYMBOL.

CXC300	TYPE NUMBER
CXC320	CXC170
CXC380	CXC174
CXC400	

DEVICE MOUNTING: CLAMPING FORCE TO BE APPLIED ON  $\phi$  OF LOCATION HOLES AND BE EVENLY DISTRIBUTED OVER AREA OF CONTACT. FLAT TOL ON SURFACES TO WHICH DEVICE IS CLAMPED TO BE 0.04 WIDE.  
 CLAMPING FORCE = 330 - 550 kgf.

G.A. DRG. No. **159B100H100-H110, 102B213.**

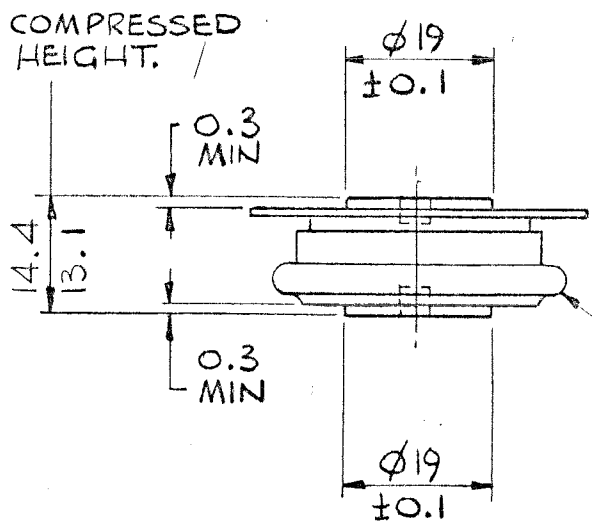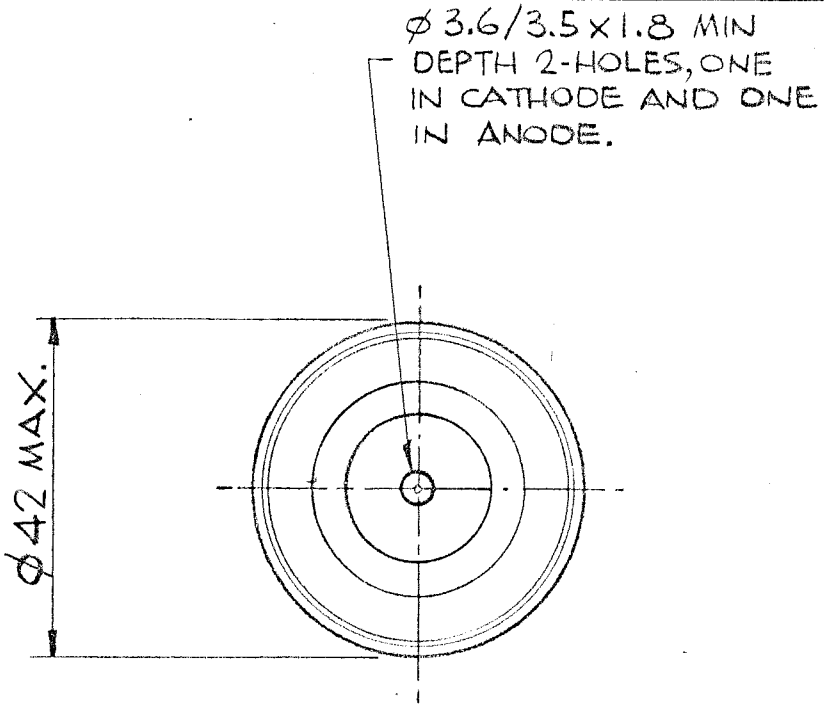


CREEP PATH OVER CONVOLUTION = 8 MIN.

THE INFORMATION CONTAINED IN THIS DRAWING IS SUPPLIED IN CONFIDENCE AND IS PROTECTED BY COPYRIGHT. THE INFORMATION MAY NOT BE DISCLOSED EXCEPT WITH THE WRITTEN PERMISSION OF AND IN MANNER PERMITTED BY THE PROPRIETORS, WESTINGHOUSE BRAKE AND SIGNAL CO. LTD.

WESTINGHOUSE BRAKE AND SIGNAL CO. LTD.  
 CHIPPENHAM, WILTSHIRE, SN15 1JD, ENGLAND.

WESTCODE<sup>®</sup>  
 SEMICONDUCTORS

THIRD ANGLE PROJECTION



DIMNS. IN MILLIMETRES

DRG. No. **100A 241**

ISS	REVISIONS	
1	10.9.76 P118	
2	REDRAWN: 15.2 / 14. WAS 15.2 / 12.5. $\phi 19$ WAS $\phi 29$ . P304. 18.5.78 <i>[Signature]</i>	
3	CLAMPING FORCE WAS 500-1200 kgf. 7.9.78 <i>[Signature]</i>	
4	11.9.78 $\phi 42$ WAS $\phi 43$ 14.35 / 13.08 WAS 15.2 / 14. CLAMP FORCE WAS 400-700 kgf. 18 <i>[Signature]</i>	
5	19.9.78 14.4 / 13.1 WAS 14.35 / 13.08 <i>[Signature]</i>	
6	30.10.78 M670 TYPE N° ADDED <i>[Signature]</i>	
7	17.9.79 M773 550 kgf WAS 700 kgf. <i>[Signature]</i>	