



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: WF101FSYFPLHNV#

| | |
|---|--|
| <p style="text-align: center;">APPROVED BY:</p> <p>(FOR CUSTOMER USE ONLY)</p> | <p>PCB VERSION: _____</p> <p>DATA: _____</p> |
|---|--|

| SALES BY | APPROVED BY | CHECKED BY | PREPARED BY |
|--------------------------------|-------------|------------|-------------|
| | | | 葉虹蘭 |
| ISSUED DATE: 2020/10/07 | | | |

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>

| RECORDS OF REVISION | | | DOC. FIRST ISSUE |
|---------------------|------------|------------------|---|
| VERSION | DATE | REVISED PAGE NO. | SUMMARY |
| 0 | 2019/07/03 | | First issue |
| A | 2019/10/15 | | Modify Electrical Characteristics (Note2) |
| B | 2020/08/13 | | Add the HDMI interface description→HDMI(only for DVI) |
| C | 2020/10/07 | | Correct Surface |

Contents

1. Module Classification Information
2. Summary
3. General Specification
4. Absolute Maximum Ratings
5. Electrical Characteristics
6. Interface Timing Characteristics
7. Optical Characteristics
8. Interface
9. Reliability
10. Contour Drawing
11. Other

1.Module Classification Information

W F 101 F S Y F P L H N V #
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

| | | | | | | | | | | | | |
|---|---|---|---|---------|---|---|--|----------------------------------|---------------|--------------------------------|---|---------|
| ① | Brand : WINSTAR DISPLAY CORPORATION | | | | | | | | | | | |
| ② | Display Type : F→TFT Type, J→Custom TFT | | | | | | | | | | | |
| ③ | Display Size : 10.1” TFT | | | | | | | | | | | |
| ④ | Model serials no. | | | | | | | | | | | |
| ⑤ | Backlight Type : | F→CCFL, White S→LED, High Light White | | | | | T→LED, White Z→Nichia LED, White | | | | | |
| ⑥ | LCD Polarize Type/ Temperature range/ Gray Scale Inversion Direction | A→Transmissive, N.T, IPS TFT C→Transmissive, N. T, 6:00 ; F→Transmissive, N.T,12:00 ; I→Transmissive, W. T, 6:00 K→Transflective, W.T,12:00 L→Transmissive, W.T,12:00 N→Transmissive, Super W.T, 6:00 | | | | | Q→Transmissive, Super W.T, 12:00 R→Transmissive, Super W.T, O-TFT V→Transmissive, Super W.T, VA TFT W→Transmissive, Super W.T, IPS TFT X→Transmissive, W.T, VA TFT Y→Transmissive, W.T, IPS TFT Z→Transmissive, W.T, O-TFT | | | | | |
| ⑦ | A : TFT LCD B : TFT+SCREW HOLES+CONTROL BOARD C : TFT+ SCREW HOLES +A/D BOARD D : TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD E : TFT+ SCREW HOLES +POWER BOARD | | | | | F : TFT+CONTROL BOARD G : TFT+ SCREW HOLES H : TFT+D/V BOARD I : TFT+ SCREW HOLES +D/V BOARD J : TFT+POWER BD | | | | | | |
| ⑧ | Resolution: | | | | | | | | | | | |
| | A | 128160 | B | 320234 | C | 320240 | D | 480234 | E | 480272 | F | 640480 |
| | G | 800480 | H | 1024600 | I | 320480 | J | 240320 | K | 800600 | L | 240400 |
| | M | 1024768 | N | 128128 | P | 1280800 | Q | 480800 | R | 640320 | S | 480128 |
| | T | 800320 | U | 8001280 | V | 176220 | W | 1280398 | X | 1024250 | Y | 1920720 |
| | Z | 800200 | 2 | 1024324 | 3 | 7201280 | 4 | 19201200 | 5 | 1366768 | 6 | 1280320 |
| ⑨ | D: Digital L : LVDS M:MIPI | | | | | | | | | | | |
| ⑩ | Interface: | | | | | | | | | | | |
| | N | Without control board | | | A | 8Bit | | B | 16Bit | | H | HDMI |
| | I | I2C Interface | | | R | RS232 | | S | SPI Interface | | U | USB |
| ⑪ | TS: | | | | | | | | | | | |
| | N | Without TS | | | T | Resistive touch panel | | | C | Capacitive touch panel (G-F-F) | | |
| | G | Capacitive touch panel (G-G) | | | | | F | Capacitive touch panel (G-F) | | | | |
| | C2 | Capacitive touch panel (G-F-F)+OCR | | | | | G1 | Capacitive touch panel (G-G)+OCA | | | | |
| | G2 | Capacitive touch panel (G-G)+OCR | | | | | B | CTP+GG+USB | | | | |
| ⑫ | Version: X:Raspberry pi ; V: Raspberry pi 3B+ | | | | | | | | | | | |
| ⑬ | Special Code | #:Fit in with ROHS directive regulations | | | | | | | | | | |

2.Summary

TFT 10.1” is a IPS transmissive type color active matrix TFT liquid crystal display . In-Plane Switching (IPS) was one of the first refinements to produce significant gains in the light-transmissive characteristics of TFT panels. It is a technology that addresses the two main issues of a standard twisted nematic (TN) TFT display: colour and viewing angle.

3.General Specifications

| Item | Dimension | Unit |
|------------------------------|------------------------|-------------|
| Screen Diagonal | 10.1 | inch |
| Number of Pixels | 1280 x 3(R GB) x 800 | dots |
| Module dimension | 230.56 x 155.01 x 25.6 | mm |
| Active area | 216.96 (H) x 135.6(V) | mm |
| Pixel pitch | 0.1695 x 0.1695 | mm |
| Display Mode | Normally Black | |
| Pixel Arrangement | R.G.B. Vertical Stripe | |
| Backlight Type | LED, Normally White | |
| Aspect Ratio | 16:9 | |
| Electrical Interface (Logic) | HDMI(only for DVI) | |
| With /Without TP | Without TP | |
| Surface | Glare | |

*Color tone slight changed by temperature and driving voltage.

4. Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|-----------------------|---------------|------------|------------|------------|-------------|
| Operating Temperature | TOP | -20 | — | +70 | °C |
| Storage Temperature | TST | -20 | — | +70 | °C |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

5. Electrical Characteristics

5.1. Operating conditions:

| Item | Symbol | Condition | Min | Typ | Max | Unit | Remark |
|------------------------|--------|-----------|-------|-----|-----|------|--------|
| Supply Voltage For LCM | VDD | — | 4.9 | 5 | 5.1 | V | — |
| Supply Current For LCM | IDD | — | — | 1.9 | 2.7 | A | Note 1 |
| LED life time | — | — | 50000 | — | — | Hr | Note 3 |

Note 1 : This value is test for VDD =5.0V , Ta=25°C only


Note 2 : Please make sure to support enough current

Note 3: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL =480mA. The LED lifetime could be decreased if operating IL is lager than 480mA.

6.LVDS Signal Timing Characteristics


6.1. AC Electrical Characteristics

| Parameter | Symbol | Values | | | Unit | Remark |
|--|--------|--------|------|------|------|-------------|
| | | Min. | Typ. | MAX. | | |
| LVDS Differential input high Threshold voltage | RxVTH | - | - | +100 | mV | RXVCM=1.2 V |
| LVDS Differential input low Threshold voltage | RxVTL | -100 | - | - | mV | |
| LVDS Differential input common mode voltage | RxVCM | 0.7 | - | 1.6 | V | |
| LVDS Differential voltage | VID | 200 | - | 600 | mV | |

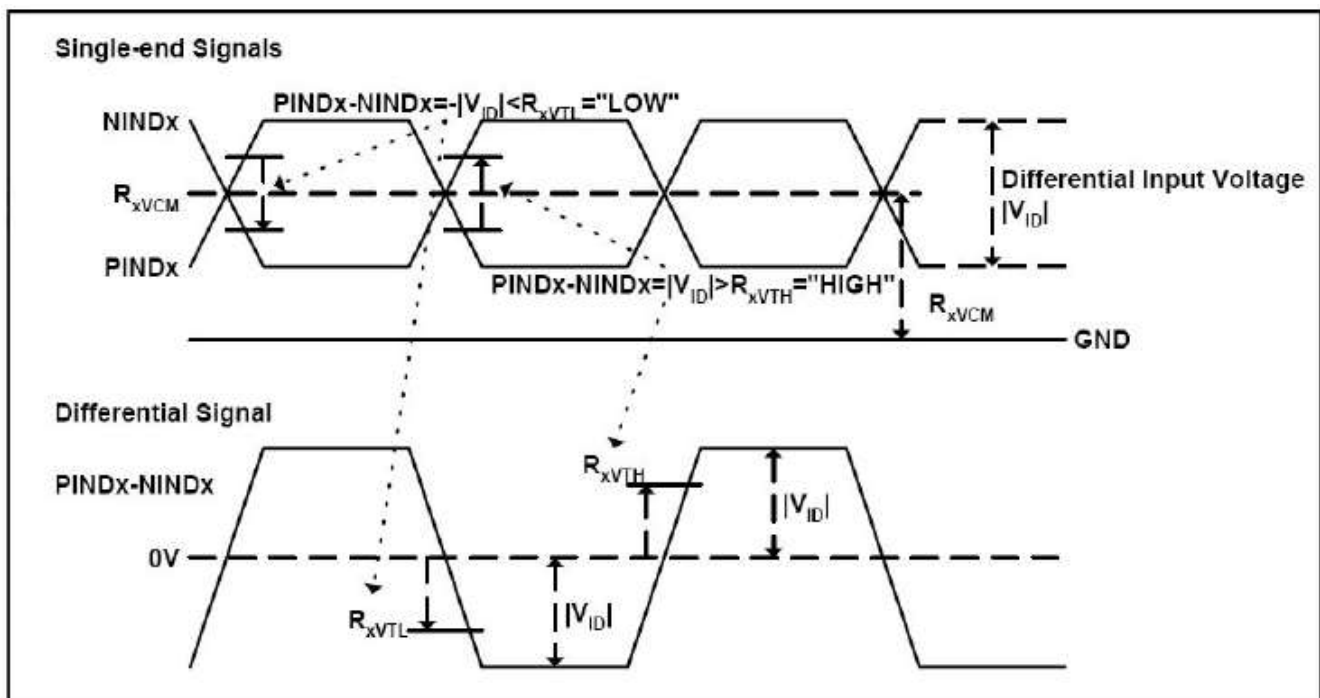


6.2. Timing Table

| Parameter | Symbol | Value | | | Unit | Remark |
|--------------------------------------|--------------------|-------|------|------|------|------------------|
| | | Min. | Typ. | Max. | | |
| Clock Frequency | 1/Tc | 68.9 | 71.1 | 73.4 | Mhz | Frame rate =60Hz |
| Horizontal display area | thd | 1280 | | | Tc | |
| HS period time | th | 1410 | 1440 | 1470 | Tc | |
| HS Width +Back Porch +Front Porch | tHW+ tHBP +tHFP | 60 | 160 | 190 | Tc | |
| Vertical display area | tvd | 800 | | | tH | |
| VS period time | tv | 815 | 823 | 833 | tH | |
| VS Width +Back Porch +Front Porch | tvW+ tvBP +tvFP | 15 | 23 | 33 | tH | |

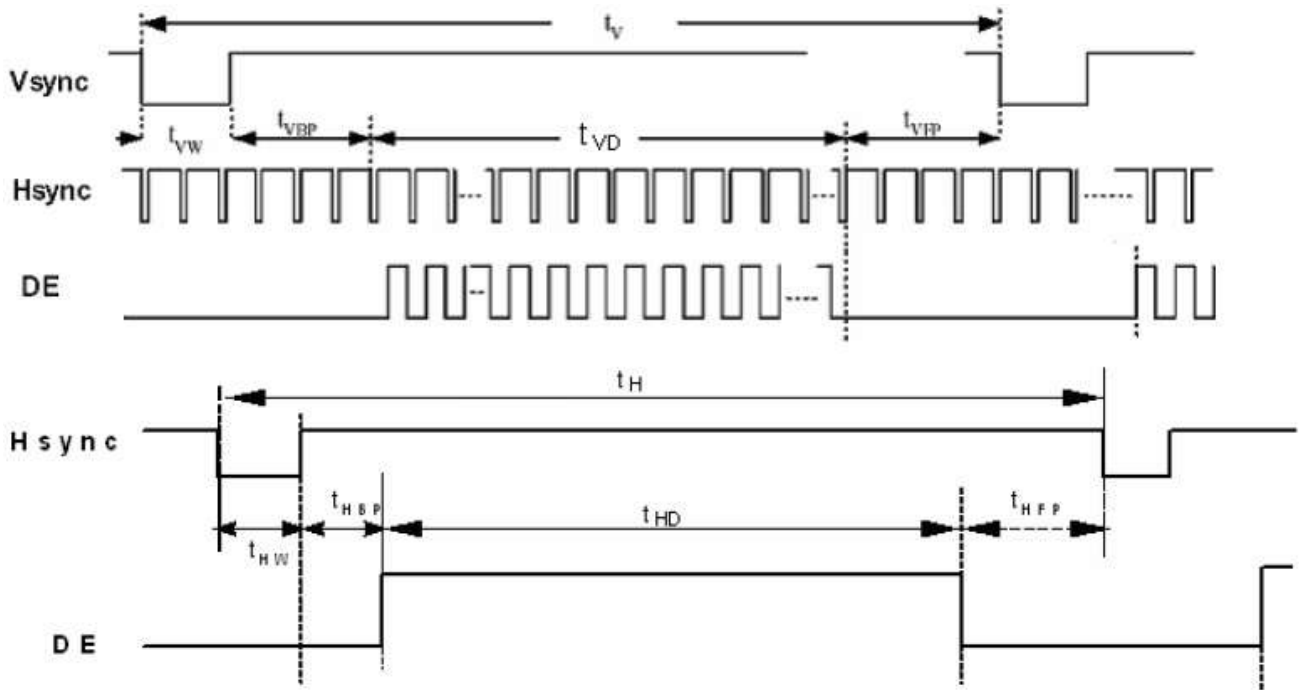

6.3. LVDS Data Input Format

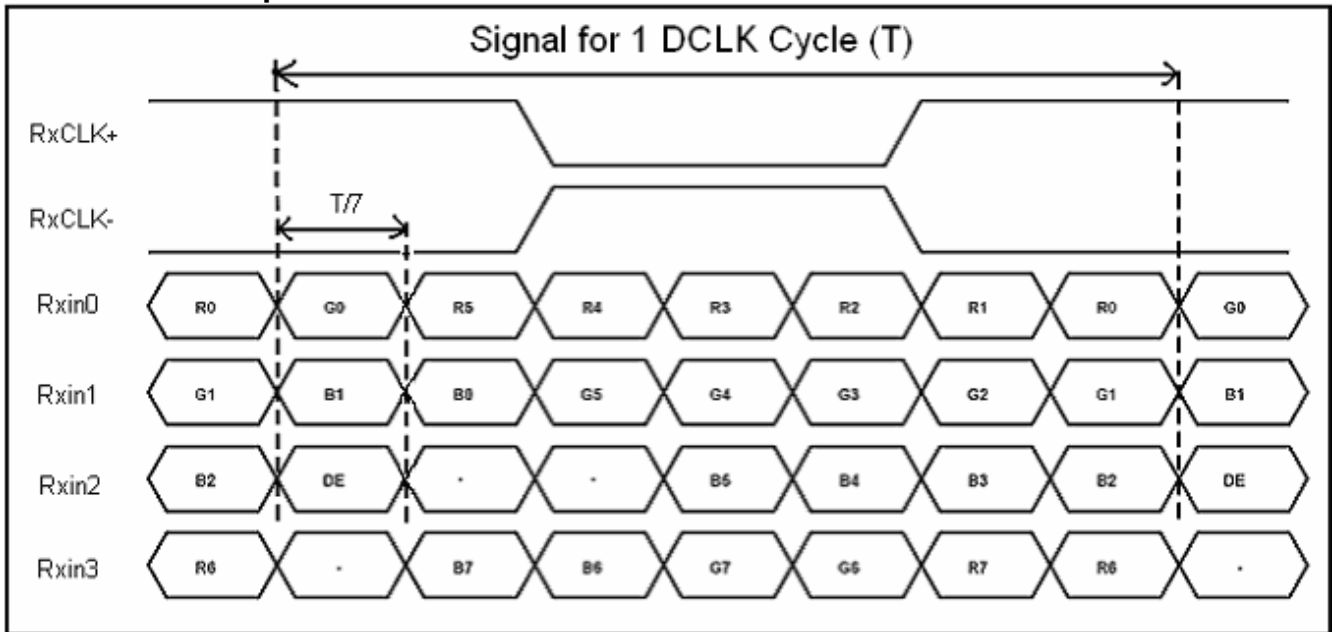

7. Optical Characteristics

| Item | Symbol | Condition. | Min | Typ. | Max. | Unit | Remark | |
|--------------------|--------|-----------------------------------|-----------------------------------|------|------|-------------------|-------------------|----------|
| Response time | Tr | $\theta=0^\circ$ 、 $\phi=0^\circ$ | - | 10 | 20 | .ms | Note 3 | |
| | Tf | | - | 15 | 30 | | | |
| Contrast ratio | CR | At optimized viewing angle | 600 | 800 | - | - | Note 4 | |
| Color Chromaticity | White | Wx | $\theta=0^\circ$ 、 $\phi=0^\circ$ | 0.26 | 0.31 | 0.36 | - | Note 2,5 |
| | | Wy | | 0.28 | 0.33 | 0.38 | - | |
| Viewing angle | Hor. | Θ_R | $CR \geq 10$ | 75 | 85 | - | Deg. | Note 1 |
| | | Θ_L | | 75 | 85 | - | | |
| | Ver. | Φ_T | | 75 | 85 | - | | |
| | | Φ_B | | 75 | 85 | - | | |
| Brightness | - | - | 1000 | 1100 | - | cd/m ² | Center of display | |
| Uniformity | (U) | - | 70 | - | - | % | Note5 | |

Ta=25±2°C

Note 1: Definition of viewing angle range

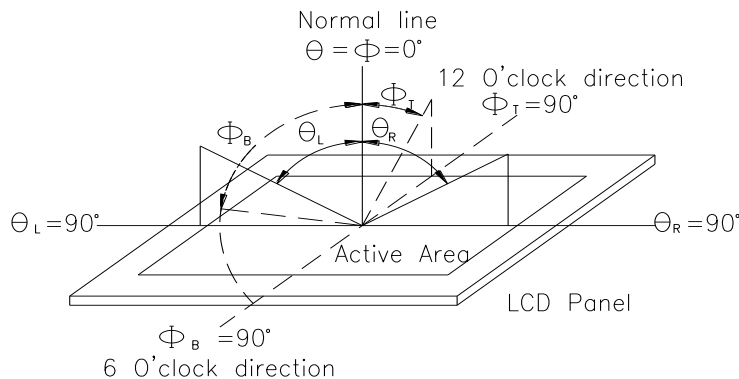


Fig. 7.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


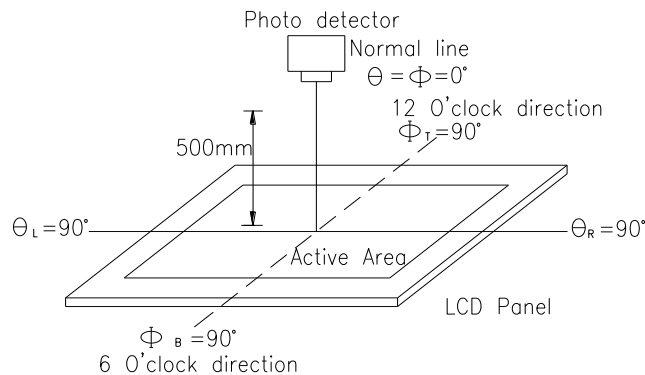


Fig. 7.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

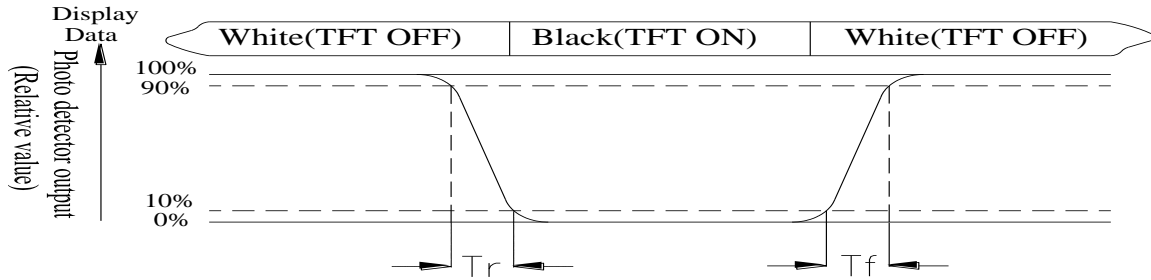

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = $L_{\min}/L_{\max} \times 100\%$

L = Active area length

W = Active area width

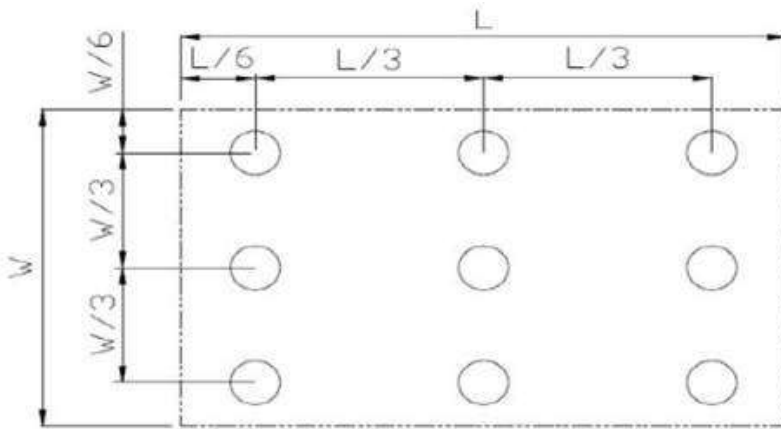


Fig 7.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

8.Interface

8.1. CON6

| Pin No. | Symbol | Function | Remark |
|---------|--------|---|--------|
| 1 | 3.3V | TFT Module Power limit can only output 3.3V,100mA | Note1 |
| 2 | 5V | Raspberry Pi:Power 5V | |
| 3 | GPIO02 | Raspberry Pi:GPIO02 | |
| 4 | 5V | Raspberry Pi:Power 5V | |
| 5 | GPIO03 | Raspberry Pi:GPIO03 | |
| 6 | GND | Raspberry Pi:GND | |
| 7 | GPIO04 | Raspberry Pi:GPIO04 | |
| 8 | GPIO14 | Raspberry Pi:GPIO14 | |
| 9 | GND | Raspberry Pi:GND | |
| 10 | GPIO15 | Raspberry Pi:GPIO15 | |
| 11 | GPIO17 | Raspberry Pi:GPIO17 | |
| 12 | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) | |
| 13 | GPIO27 | Raspberry Pi:GPIO27 | |
| 14 | GND | Raspberry Pi:GND | |
| 15 | GPIO22 | Raspberry Pi:GPIO22 | |
| 16 | GPIO23 | Raspberry Pi:GPIO23 | |
| 17 | 3.3V | TFT Module Power limit can only output 3.3V,100mA | Note1 |
| 18 | GPIO24 | Raspberry Pi:GPIO24 | |
| 19 | GPIO10 | Raspberry Pi:GPIO10 | |
| 20 | GND | Raspberry Pi:GND | |
| 21 | GPIO09 | Raspberry Pi:GPIO09 | |
| 22 | GPIO25 | Raspberry Pi:GPIO25 | |
| 23 | GPIO11 | Raspberry Pi:GPIO11 | |
| 24 | GPIO08 | Raspberry Pi:GPIO08 | |
| 25 | GND | Raspberry Pi:GND | |
| 26 | GPIO07 | Raspberry Pi:GPIO07 | |
| 27 | ID_SD | Raspberry Pi:ID_SD | |
| 28 | ID_SC | Raspberry Pi:ID_SC | |
| 29 | GPIO05 | Raspberry Pi:GPIO05 | |
| 30 | GND | Raspberry Pi:GND | |

| | | | |
|----|--------|---------------------|--|
| 31 | GPIO06 | Raspberry Pi:GPIO06 | |
| 32 | GPIO12 | Raspberry Pi:GPIO12 | |
| 33 | GPIO13 | Raspberry Pi:GPIO13 | |
| 34 | GND | Raspberry Pi:GND | |
| 35 | GPIO19 | Raspberry Pi:GPIO19 | |
| 36 | GPIO16 | Raspberry Pi:GPIO16 | |
| 37 | GPIO26 | Raspberry Pi:GPIO26 | |
| 38 | GPIO20 | Raspberry Pi:GPIO20 | |
| 39 | GND | Raspberry Pi:GND | |
| 40 | GPIO21 | Raspberry Pi:GPIO21 | |

Note1: The 3.3V supply current is limited; please pay special attention to use

8.2. CON5

| Pin No. | Symbol | Function | Remark |
|---------|--------|--|--------|
| 1 | NC | No connection | |
| 2 | 5V | Raspberry Pi:Power 5V | |
| 3 | GPIO02 | Raspberry Pi:GPIO02 | |
| 4 | 5V | Raspberry Pi:Power 5V | |
| 5 | GPIO03 | Raspberry Pi:GPIO03 | |
| 6 | GND | Raspberry Pi:GND | |
| 7 | GPIO04 | Raspberry Pi:GPIO04 | |
| 8 | GPIO14 | Raspberry Pi:GPIO14 | |
| 9 | GND | Raspberry Pi:GND | |
| 10 | GPIO15 | Raspberry Pi:GPIO15 | |
| 11 | GPIO17 | Raspberry Pi:GPIO17 | |
| 12 | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) | |
| 13 | GPIO27 | Raspberry Pi:GPIO27 | |
| 14 | GND | Raspberry Pi:GND | |
| 15 | GPIO22 | Raspberry Pi:GPIO22 | |
| 16 | GPIO23 | Raspberry Pi:GPIO23 | |
| 17 | NC | No connection | |
| 18 | GPIO24 | Raspberry Pi:GPIO24 | |
| 19 | GPIO10 | Raspberry Pi:GPIO10 | |
| 20 | GND | Raspberry Pi:GND | |
| 21 | GPIO09 | Raspberry Pi:GPIO09 | |

| | | | |
|----|--------|---------------------|--|
| 22 | GPIO25 | Raspberry Pi:GPIO25 | |
| 23 | GPIO11 | Raspberry Pi:GPIO11 | |
| 24 | GPIO08 | Raspberry Pi:GPIO08 | |
| 25 | GND | Raspberry Pi:GND | |
| 26 | GPIO07 | Raspberry Pi:GPIO07 | |
| 27 | ID_SD | Raspberry Pi:ID_SD | |
| 28 | ID_SC | Raspberry Pi:ID_SC | |
| 29 | GPIO05 | Raspberry Pi:GPIO05 | |
| 30 | GND | Raspberry Pi:GND | |
| 31 | GPIO06 | Raspberry Pi:GPIO06 | |
| 32 | GPIO12 | Raspberry Pi:GPIO12 | |
| 33 | GPIO13 | Raspberry Pi:GPIO13 | |
| 34 | GND | Raspberry Pi:GND | |
| 35 | GPIO19 | Raspberry Pi:GPIO19 | |
| 36 | GPIO16 | Raspberry Pi:GPIO16 | |
| 37 | GPIO26 | Raspberry Pi:GPIO26 | |
| 38 | GPIO20 | Raspberry Pi:GPIO20 | |
| 39 | GND | Raspberry Pi:GND | |
| 40 | GPIO21 | Raspberry Pi:GPIO21 | |

8.3. HDMI

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|---------------------------------|--------|
| 1 | Rx2+ | I | +LVDS Differential Data Input | |
| 2 | GND | P | Ground | |
| 3 | Rx2- | I | -LVDS Differential Data Input | |
| 4 | Rx1+ | I | +LVDS Differential Data Input | |
| 5 | GND | P | Ground | |
| 6 | Rx1- | I | -LVDS Differential Data Input | |
| 7 | Rx0+ | I | +LVDS Differential Data Input | |
| 8 | GND | P | Ground | |
| 9 | Rx0- | I | -LVDS Differential Data Input | |
| 10 | RxC+ | I | +LVDS Differential Clock Input | |
| 11 | GND | P | Ground | |
| 12 | RxC- | I | -LVDS Differential Clock Input | |
| 13-14 | NC | - | No connection | |
| 15 | SCL | I/O | DDC(Data Display Channel) Clock | |
| 16 | SDA | I/O | DDC(Data Display Channel) Data | |
| 17 | GND | P | Ground | |
| 18 | 5V | P | Power Supply | |
| 19 | Detect | I/O | Hot plug detect | |


I: input, O: output, P: Power

8.4. POWER-JACK

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|-------------------|--------|
| 1 | 5V | P | Power Supply (5V) | |
| 2 | GND | P | Ground | |
| 3 | NC | - | No connection | |

9. Reliability

Content of Reliability Test (Wide temperature, -20°C ~70°C)

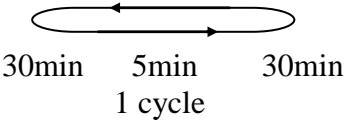
| Environmental Test | | | |
|--------------------------------------|--|---|------|
| Test Item | Content of Test | Test Condition | Note |
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | 70°C 200hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -20°C 200hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time. | 70°C 200hrs | — |
| Low Temperature Operation | Endurance test applying the electric stress under low temperature for a long time. | -20°C 200hrs | 1 |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60 °C, 90%RH max | 60°C, 90%RH 96hrs | 1,2 |
| Thermal shock resistance | <p>The sample should be allowed stand the following 10 cycles of operation</p> <p style="text-align: center;">-20°C 25°C 70°C</p>  <p style="text-align: center;">30min 5min 30min 1 cycle</p> | -20°C /70°C 10 cycles | — |
| Vibration test | Endurance test applying the vibration during transportation and using. | Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3 |
| Static electricity test | Endurance test applying the electric stress to the terminal. | VS=±600V(contact), ±800v(air), RS=330Ω CS=150pF 10 times | — |


Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

10. Contour Drawing

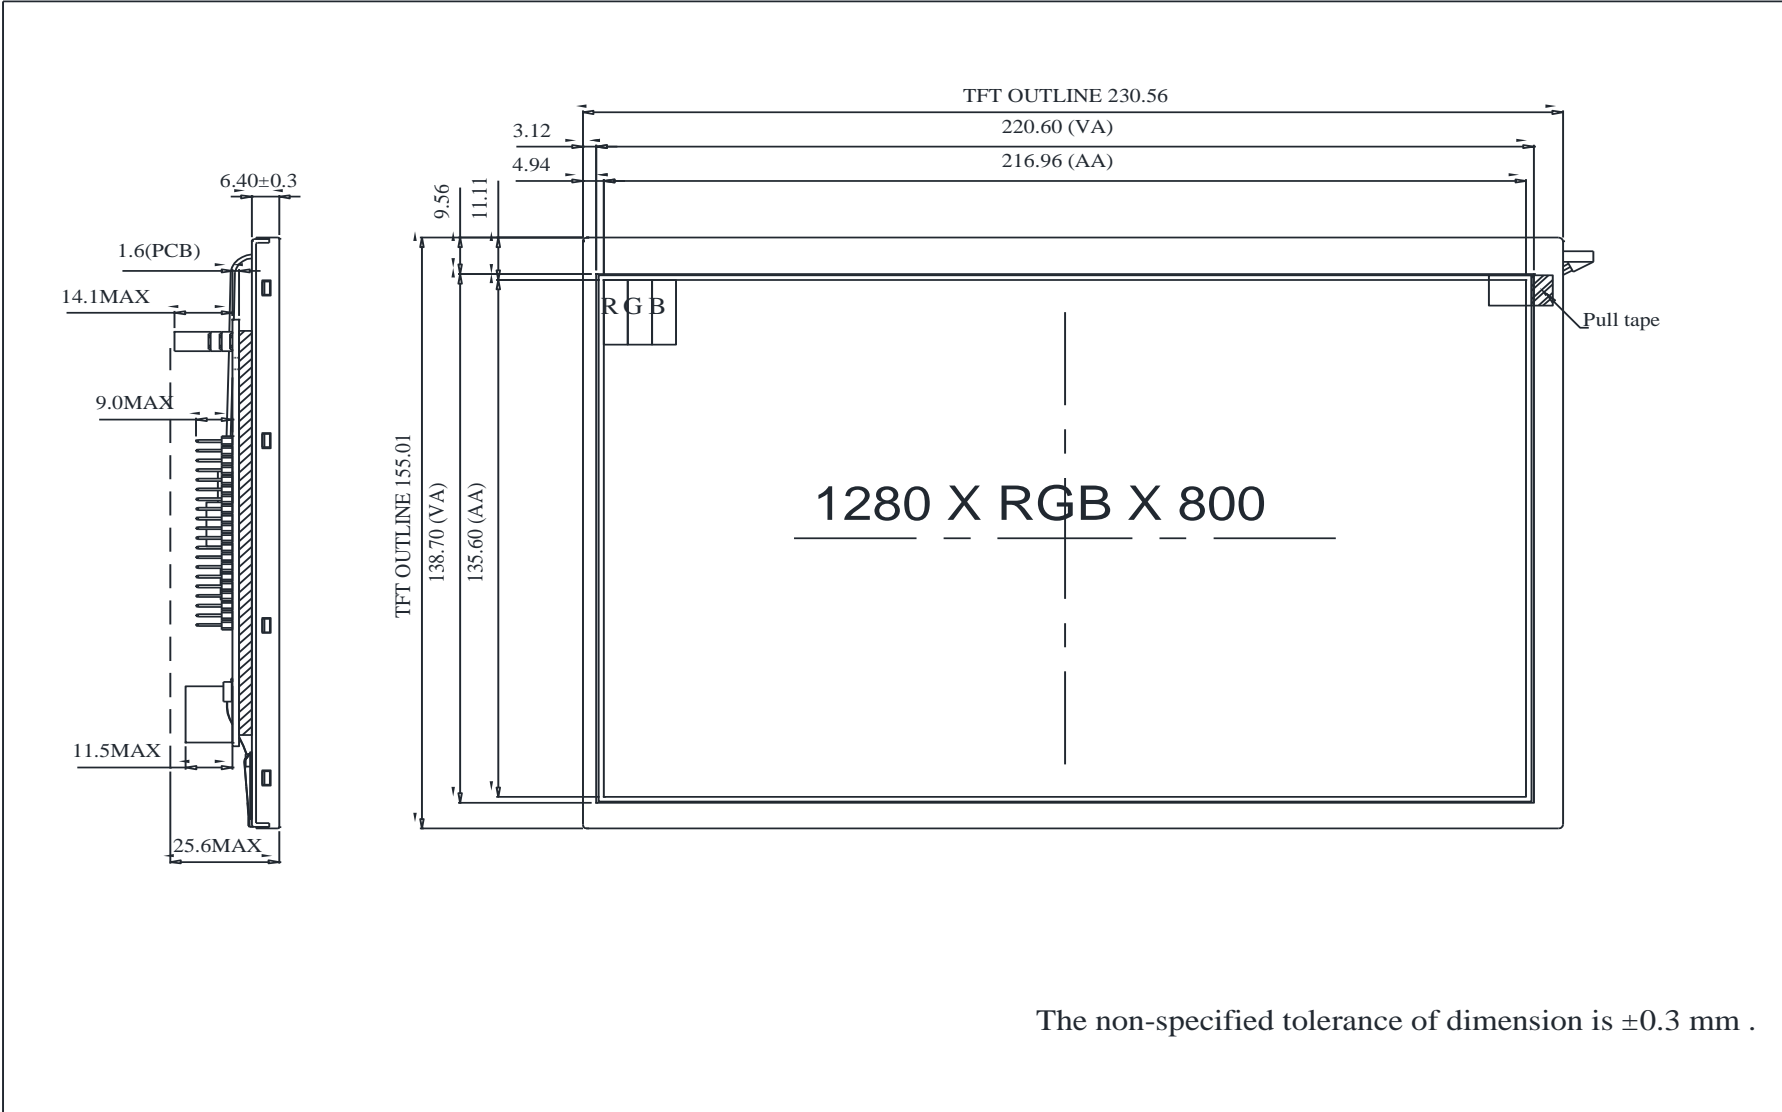

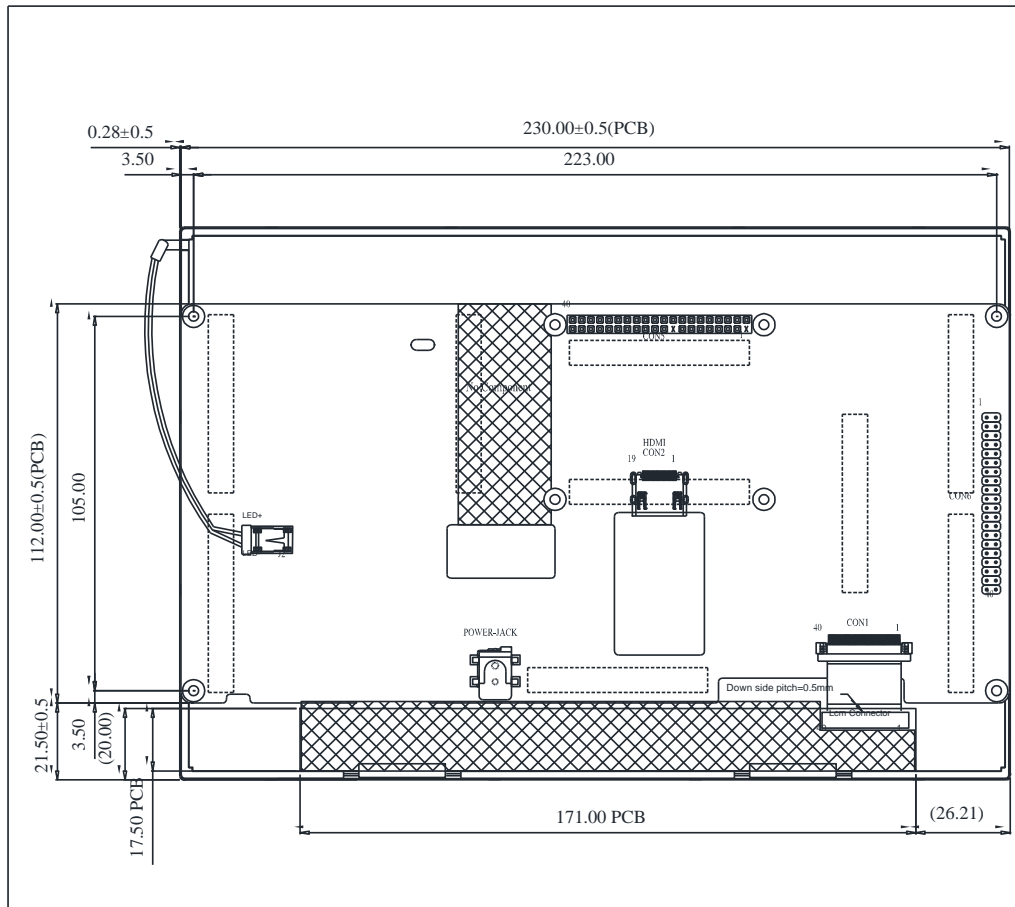

HDMI

| PIN NO. | SYMBOL |
|---------|--------|
| 1 | RX2+ |
| 2 | GND |
| 3 | RX2- |
| 4 | RX1+ |
| 5 | GND |
| 6 | RX1- |
| 7 | RX0+ |
| 8 | GND |
| 9 | RX0- |
| 10 | RXC+ |
| 11 | GND |
| 12 | RXC- |
| 13 | NC |
| 14 | NC |
| 15 | SCL |
| 16 | SDA |
| 17 | GND |
| 18 | 5V |
| 19 | Detect |

CON5


| Pin | Symbol | Pin | Symbol |
|-----|--------|-----|--------|
| 1 | NC | 21 | GPIO09 |
| 2 | 5V | 22 | GPIO25 |
| 3 | GPIO02 | 23 | GPIO11 |
| 4 | 5V | 24 | GPIO08 |
| 5 | GPIO03 | 25 | GND |
| 6 | GND | 26 | GPIO07 |
| 7 | GPIO04 | 27 | ID_SD |
| 8 | GPIO14 | 28 | ID_SC |
| 9 | GND | 29 | GPIO05 |
| 10 | GPIO15 | 30 | GND |
| 11 | GPIO17 | 31 | GPIO06 |
| 12 | GPIO18 | 32 | GPIO12 |
| 13 | GPIO27 | 33 | GPIO13 |
| 14 | GND | 34 | GND |
| 15 | GPIO22 | 35 | GPIO19 |
| 16 | GPIO23 | 36 | GPIO16 |
| 17 | NC | 37 | GPIO26 |
| 18 | GPIO24 | 38 | GPIO20 |
| 19 | GPIO10 | 39 | GND |
| 20 | GND | 40 | GPIO21 |

CON6

| Pin | Symbol | Pin | Symbol |
|-----|--------|-----|--------|
| 1 | 3.3V | 21 | GPIO09 |
| 2 | 5V | 22 | GPIO25 |
| 3 | GPIO02 | 23 | GPIO11 |
| 4 | 5V | 24 | GPIO08 |
| 5 | GPIO03 | 25 | GND |
| 6 | GND | 26 | GPIO07 |
| 7 | GPIO04 | 27 | ID_SD |
| 8 | GPIO14 | 28 | ID_SC |
| 9 | GND | 29 | GPIO05 |
| 10 | GPIO15 | 30 | GND |
| 11 | GPIO17 | 31 | GPIO06 |
| 12 | GPIO18 | 32 | GPIO12 |
| 13 | GPIO27 | 33 | GPIO13 |
| 14 | GND | 34 | GND |
| 15 | GPIO22 | 35 | GPIO19 |
| 16 | GPIO23 | 36 | GPIO16 |
| 17 | 3.3V | 37 | GPIO26 |
| 18 | GPIO24 | 38 | GPIO20 |
| 19 | GPIO10 | 39 | GND |
| 20 | GND | 40 | GPIO21 |

POWER JACK

| PIN NO. | SYMBOL |
|---------|--------|
| 1 | 5V |
| 2 | GND |
| 3 | NC |



The non-specified tolerance of dimension is ±0.3 mm .



1、Panel Specification :

- 1. Panel Type : Pass NG , _____
- 2. View Direction : Pass NG , _____
- 3. Numbers of Dots : Pass NG , _____
- 4. View Area : Pass NG , _____
- 5. Active Area : Pass NG , _____
- 6. Operating Temperature : Pass NG , _____
- 7. Storage Temperature : Pass NG , _____
- 8. Others : _____

2、Mechanical Specification :

- 1. PCB Size : Pass NG , _____
- 2. Frame Size : Pass NG , _____
- 3. Material of Frame : Pass NG , _____
- 4. Connector Position : Pass NG , _____
- 5. Fix Hole Position : Pass NG , _____
- 6. Backlight Position : Pass NG , _____
- 7. Thickness of PCB : Pass NG , _____
- 8. Height of Frame to PCB : Pass NG , _____
- 9. Height of Module : Pass NG , _____
- 10. Others : Pass NG , _____

3、Relative Hole Size :

- 1. Pitch of Connector : Pass NG , _____
- 2. Hole size of Connector : Pass NG , _____
- 3. Mounting Hole size : Pass NG , _____
- 4. Mounting Hole Type : Pass NG , _____
- 5. Others : Pass NG , _____

4、Backlight Specification :

- 1. B/L Type : Pass NG , _____
- 2. B/L Color : Pass NG , _____
- 3. B/L Driving Voltage (Reference for LED Type) : Pass NG , _____
- 4. B/L Driving Current : Pass NG , _____
- 5. Brightness of B/L : Pass NG , _____
- 6. B/L Solder Method : Pass NG , _____
- 7. Others : Pass NG , _____

>> **Go to page 2** <<



Winstar Module Number : _____

Page: 2

5、Electronic Characteristics of Module :

- 1. Input Voltage : Pass NG , _____
- 2. Supply Current : Pass NG , _____
- 3. Driving Voltage for LCD : Pass NG , _____
- 4. Contrast for LCD : Pass NG , _____
- 5. B/L Driving Method : Pass NG , _____
- 6. Negative Voltage Output : Pass NG , _____
- 7. Interface Function : Pass NG , _____
- 8. LCD Uniformity : Pass NG , _____
- 9. ESD test : Pass NG , _____
- 10. Others : Pass NG , _____

6、Summary :

Sales signature : _____

Customer Signature : _____

Date : / / _____