
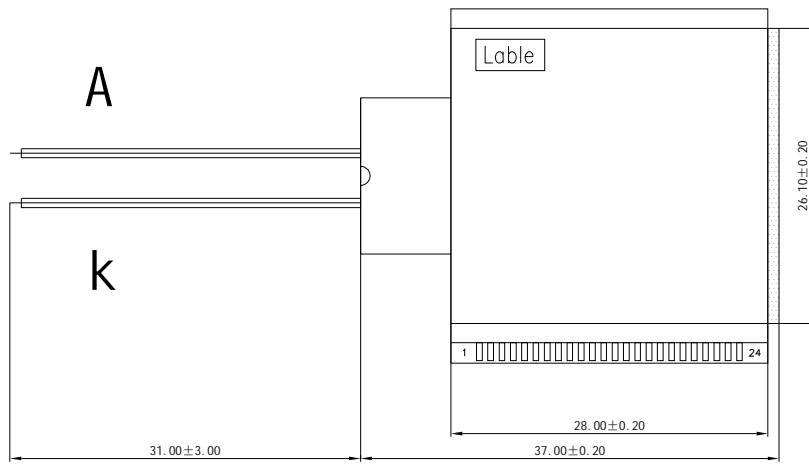
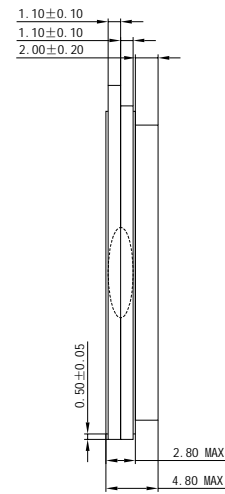





REV.	CHANGE CONTENT	BY	DATE
A	FIRST	WHC	2020.05.07

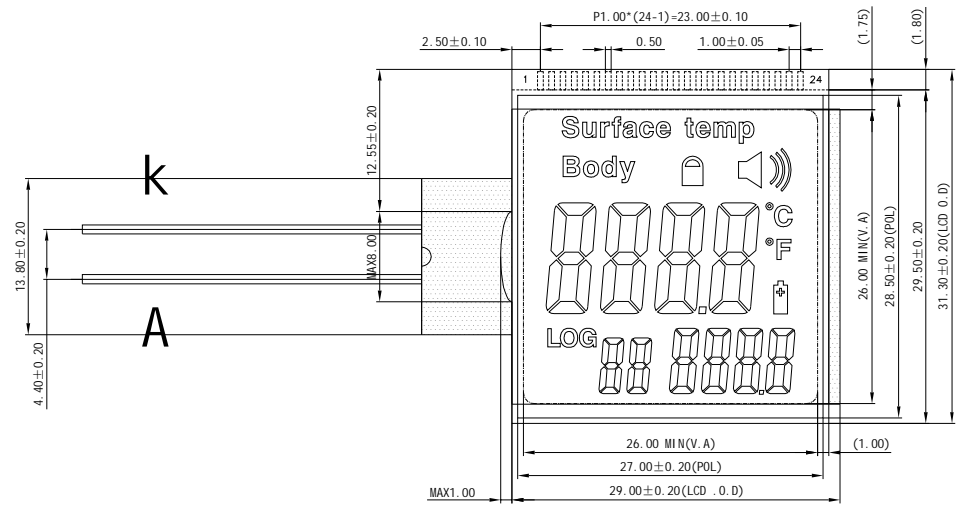

- NOTES:
- 1.FRONT POLARIZER :TRANSMISSIVE
 - 2.BACK POLARIZER :TRANSMISSIVE
 - 3.OPERATING TEMP :0°C TO +50°C
 - 4.STORAGE TEMP :-10°C TO +60°C
 - 5.VIEWING DIRECTION :6 O'CLOCK
 - 6.RIVE CONDITION :1/4D 1/3B, 3.0V
 - 7.DISPLAY MODE :TN, POSITIVE MODE
 - 8.CONNECTOR:ZEBRA
 - 9.FORWARD CURRENT:15mA
 - 10.FORWARD VOLTAGE:2.8-3.2V
 - 11.DOMINANT WAVE LENGTH:465-470nm
 - 12.ROHS COMPLIANT

			DRAWING No. :HS00D44-VA	
			DRAWING TITLE:LCD	
FILE NO. :			REV. :A	
DESIGN	WHC	2020.05.07	SCALE: 1:1	
CHECKED	HK	2020.05.07	PROJECTION:	
APPROVED	XYP	2020.05.07	UNIT: mm	
			SHEET: 1/3	

REV.	CHANGE CONTENT	BY	DATE
A	FIRST	WHC	2020.05.07

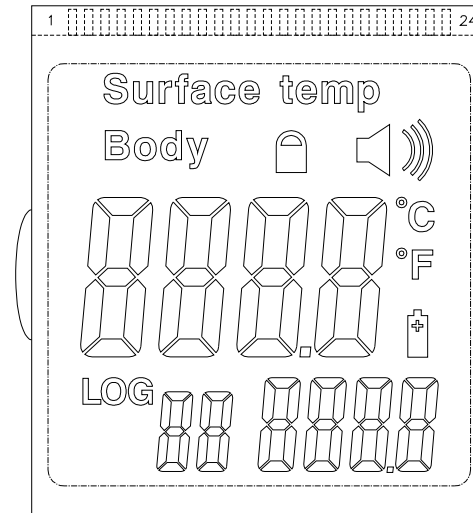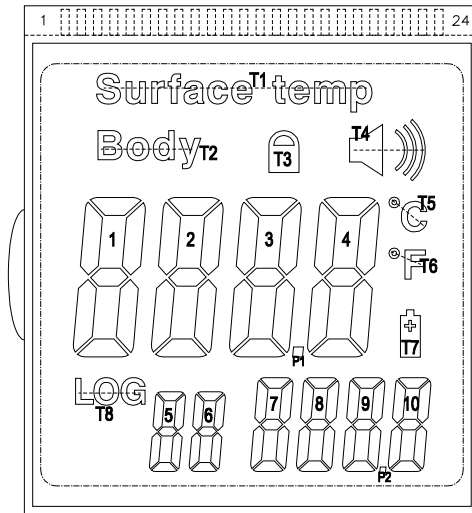


显示效果图


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1				COM1	1A	1B	2A	2B	3A	3B	4A	4B	5A	5B	6A	6B	7A	7B	8A	8B	9A	9B	10A	10B
COM2			COM2		1F	1G	2F	2G	3F	3G	4F	4G	5F	5G	6F	6G	7F	7G	8F	8G	9F	9G	10F	10G
COM3		COM3			1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	7E	7C	8E	8C	9E	9C	10E	10C
COM4	COM4				1D	T1	2D	T2	3D	P1	4D	T4	5D	T8	6D	T3	7D	T5	8D	T6	9D	P2	10D	T7

			DRAWING No. :HS00D44-VA	
			DRAWING TITLE:LCD	
DESIGN			WHC	2020.05.07
CHECKED			HK	2020.05.07
APPROVED			ZXY	2020.05.07
REV. :A		SCALE: 1:1		
PROJECTION:		UNIT: mm		
		SHEET: 2/3		

REV.	CHANGE CONTENT	BY	DATE
A	FIRST	WHC	2020.05.07

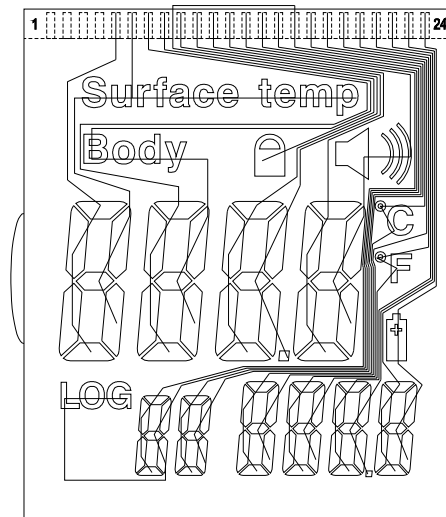



SEG

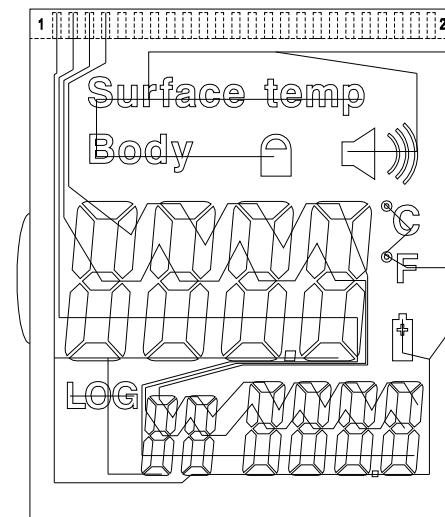

COM

此页仅供走线参考，不做图案效果

 HTDISPLAY Co., Ltd.			DRAWING No. :HS00D44-VA	
			DRAWING TITLE:LCD	
DESIGN			WHC	2020.05.07
CHECKED			HK	2020.05.07
APPROVED			ZXY	2020.05.07
REV. :A		SCALE: 1:1		
PROJECTION:		UNIT: mm		
		SHEET: 3/3		